

# DMJK-150

## Technical Data

EXCEPTIONAL POWER AND RELIABLE MATERIAL FEED SET  
GUARANTEE HIGH PERFORMANCE



REMA S.A.

ul. B. Chrobrego 5, 11-440 Reszel, Poland  
tel./ fax 89 755 01 19, e-mail: [marketing@rema-sa.pl](mailto:marketing@rema-sa.pl)  
[www.rema-sa.pl](http://www.rema-sa.pl)

 **REMA**<sup>®</sup>  
WOODWORKING MACHINES

## Technical Data

### Multiblade rip saw DMJK-150 SPECIAL

Saw blade diameter	- 400 mm
Sawing height	25 - 150 mm
Min. thickness of the finished strips	8 mm
Max. distance between extreme saw blades	280 mm
Min. length of material	800 mm
Main motor power	55 kW
Spindle rotation speed	4200 rpm
Spindle tip diameter	Ø 80 mm
Speed of working feed (stepless regulation)	2,5 - 25 m/min
Transporter width	300 mm
Motor power of feed driving	3 kW
Motor power of the pressure rollers	2 x 0,75 kW
Extraction outlet diameter	Ø 200 mm
Air request of extraction system	3400 m³/h
Height to table surface	850 mm
Weight	3200 kg


## Packaging

		Lenght	Width	Height	Weight
DMJK-150	A	2360 mm	1400 mm	1900 mm	3200 kg
	B	2500 mm	1550 mm	2000 mm	3300 kg

A – Packaging for road transportation (carton + stretch film)

B - Packaging for oversea transportation (wooden box)

## Overall dimensions

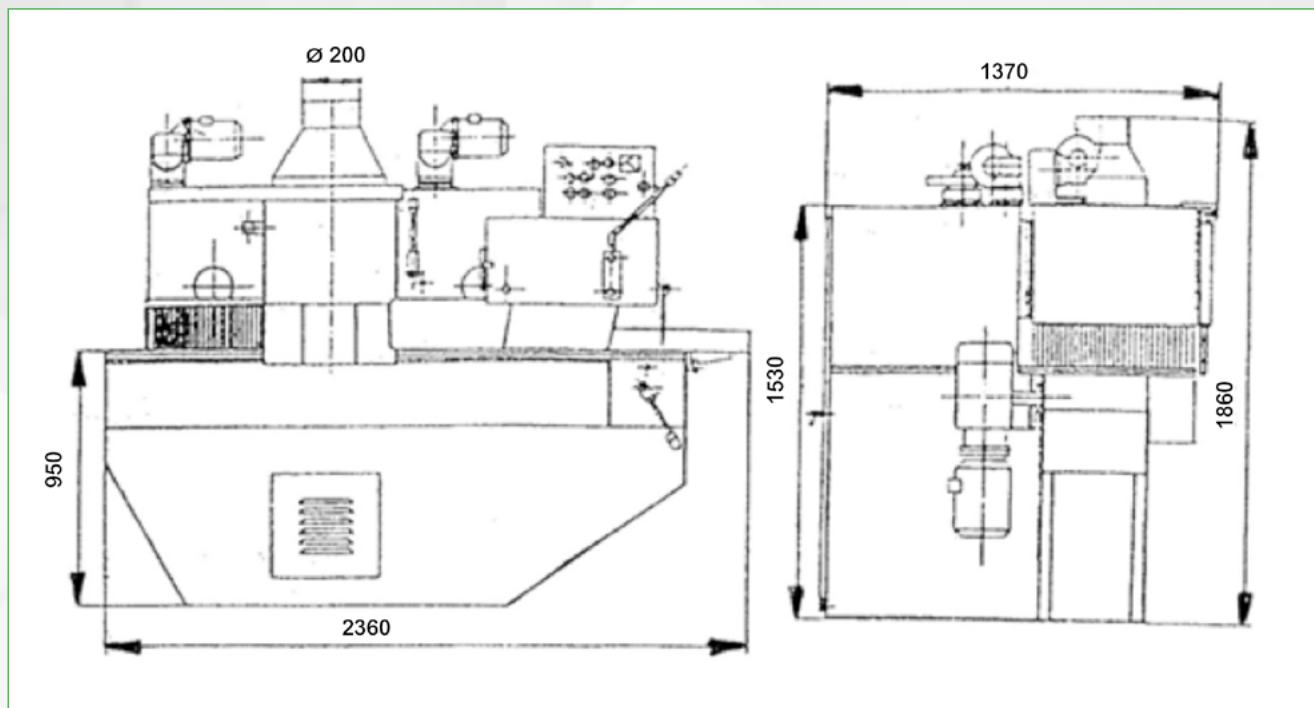

REMA S.A.

ul. B. Chrobrego 5, 11-440 Reszel, Poland  
 tel./ fax 89 755 01 19, e-mail: marketing@rema-sa.pl  
 www.rema-sa.pl